

MULTITASKS

RSL

FAE multi-function head for tractors from 80 to 190 hp.

The RSL is a multifunction head that enables milling of slabs of rock and asphalt, crushing of stones and stabilization of the ground, to a depth of 28 cm. The compact size, low weight and minimum operating width of 100 cm make it perfect in limited spaces such as small areas of asphalt and in road maintenance. The gear transmission enables operation with


constantly optimal levels of torque and power. The dedicated teeth guarantee optimal results in the presence of stones and slabs of rock. The crushing chamber is protected by Hardox coatings to offer maximum wear resistance even in the most demanding conditions.



80-190 hp



Depth 28 cm max

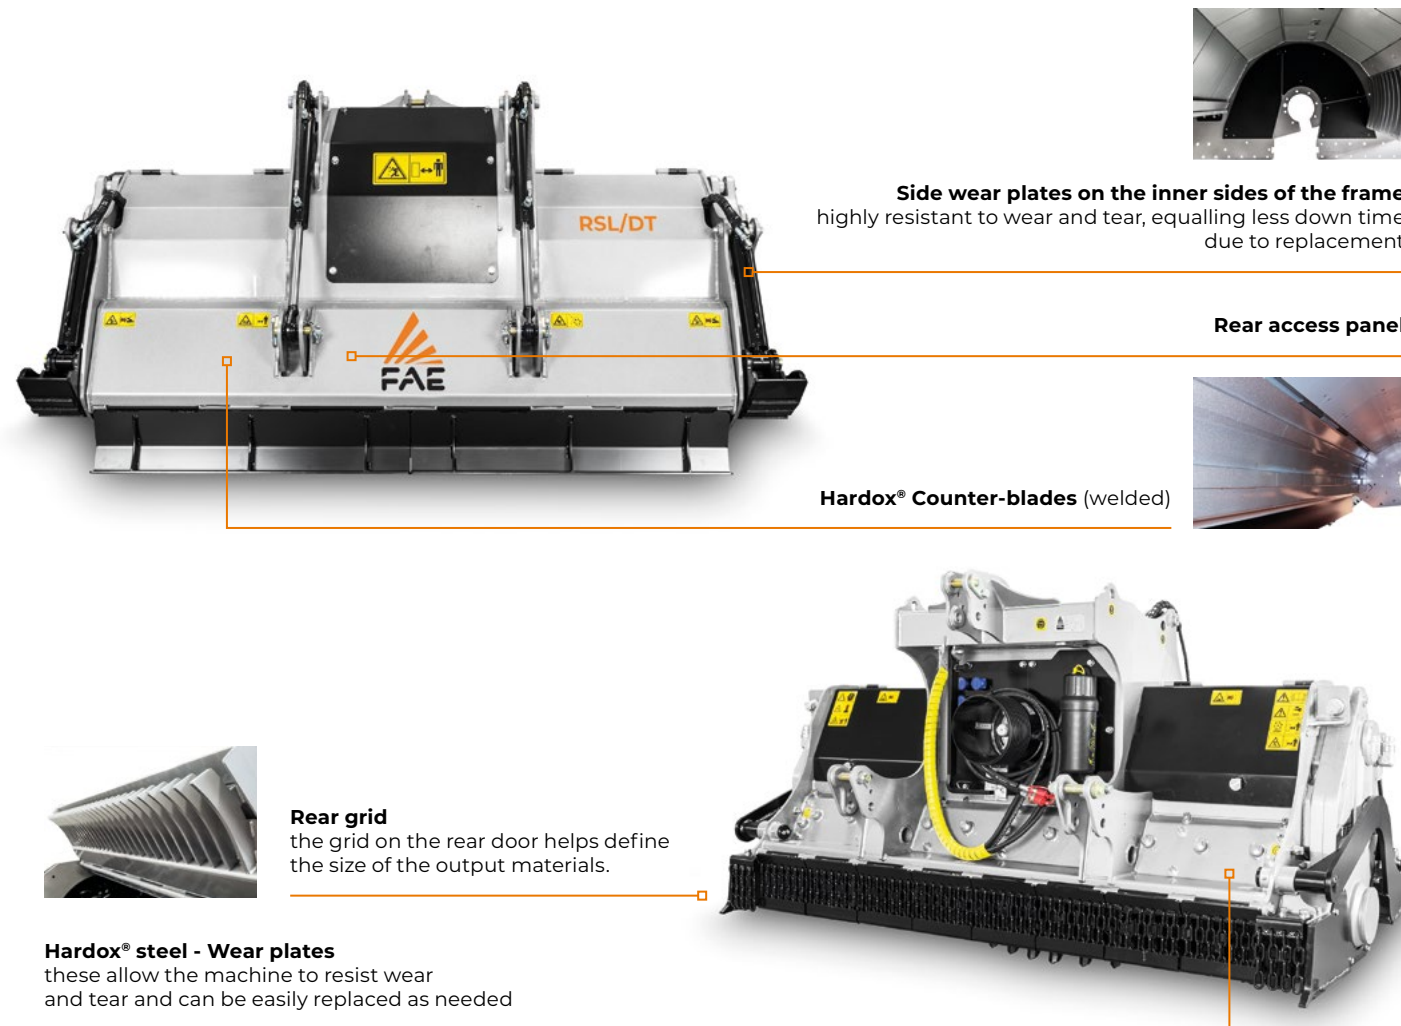

STANDARD EQUIPMENT

Hydraulic rear hood	Gearbox with freewheel
Interchangeable inner antiwear plates in Hardox®	Friction clutches (RSL/DT)
Enclosed machine body	PTO shaft with cam clutch
Bolted grid on rear hood	Bolted-on rotor shafts (in forged steel)
Inside lateral protection	Flat pressed welded steel counter-blades
Protection chains	Hydraulically adjustable skids
Transmission with side gearbox (RSL/DT)	Dozing blades

OPTIONS

Bolt-on chain's protection plates	Water spray system WSS Basic
Multiple tooth options	Water spray system WSS High Flow (RSL/DT)
Hydraulic top link	Extended 3 point linkage (RSL/ST)

MODEL	RSL/ST 100	RSL/ST 125	RSL/ST 150	RSL/DT 175	RSL/DT 200	RSL/DT 225
Tractor (hp)	80-120	90-120	100-120	120-190	130-190	140-190
PTO (rpm)	540	540	540	1000	1000	1000
Working width (mm)	1000	1240	1480	1720	1960	2200
Total width (mm)	1340	1580	1820	2060	2300	2540
Weight (Kg)	1600	1800	1960	2350	2500	2650
Rotor diameter (mm)	595	595	595	595	595	595
Working depth (mm) (Max. 1-Max. 2)	150-280	150-280	150-280	150-280	150-280	150-280
ROTOR G/3						
No. teeth type G/3+STC/3/FP	28+6	36+6	42+6	50+6	60+6	70+6
ROTOR R						
Working depth (mm) (Max. 1-Max. 2)	160-280	160-280	160-280	160-280	160-280	160-280
No. teeth type R+R/HD	58+16	82+16	98+16	122+16	138+16	154+16

Max. 1: with rotor only **Max. 2:** maximum depth (maximum working depth depending on ground conditions).
This information refers to the machine equipped as standard. The technical data in this catalogue may be altered without prior notice.

MAIN OPTIONS



Hydraulic top link



Bolt-on chain's protection plates



Multiple tooth options



The **Water Spray System** (Basic & High Flow) has the dual function of cooling and mixing

ROTOR TYPE G



G/3 (standard)



G/3/HD (option)



ADAPTOR G/3 R 44 (option)

ROTOR TYPE R



R 65 (standard)



R/HD 65 (option)



ADAPTOR R 44 (option)



STC/3/FP (side scraper)



R/HD 65 (side scraper)